


AC/DC sensitive residual current monitor RCMA475LY

for TN and TT systems (AC, DC, pulsating DC currents)

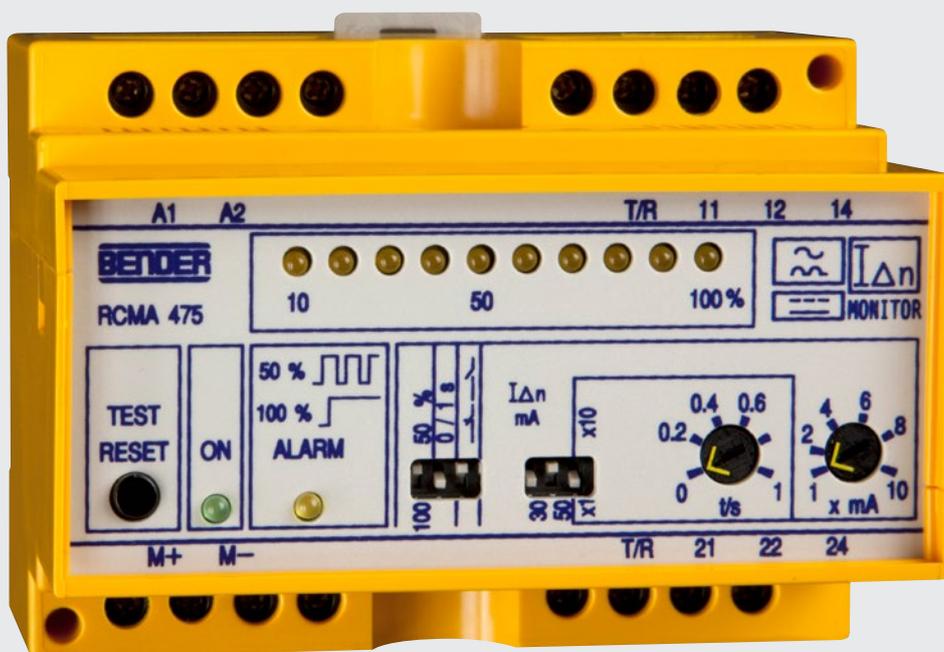

Residual current monitor RCMA475LY

AC/DC sensitive residual current monitor
for TN and TT systems (AC, DC, pulsating DC currents)



RCMA475LY

Device features

- Internal measuring current transformer \varnothing 18 mm
- Two response values
alarm $I_{\Delta n1}$: 30...500 mA (0...700 Hz)
prewarning $I_{\Delta n2}$: 50 %/100 % of $I_{\Delta n1}$
- Response delay, adjustable 0...10 s (prewarning 0/1 s)
- Two separate alarm relays with one changeover contact each
- N/O or N/C operation, selectable
- Fault memory
- Combined test/reset button
- Connection external test and reset button
- LED bar graph indicator $I_{\Delta n}$ 0...100 %
- Connection external measuring instrument $I_{\Delta n}$ 0...100 %
- Sealable transparent cover
- External supply voltage
- Type B acc. to IEC/TR 60755

Approvals



Product description

The AC/DC sensitive residual current monitor RCMA475LY is designed for monitoring earthed power supply systems (TN and TT systems) where DC fault currents or residual currents continuously greater than zero may occur. These are in particular loads containing six-pulse rectifiers or one way rectifiers with smoothing, such as converters, battery chargers, construction site equipment with frequency-controlled drives.

The prewarning stage (50 % of the set response value $I_{\Delta n1}$) allow to distinguish between prewarning and alarm. Since the values are measured with measuring current transformers, the device is nearly independent of the load current and the nominal voltage of the system.

Application

- AC/DC sensitive residual current monitoring in earthed two, three or four conductor systems (TN and TT systems)
- AC/DC sensitive current monitoring of single conductors de-energised under normal conditions (e.g. N and PE conductors)
- Variable-speed drives
- Uninterruptible power supply systems (UPS)

Function


Residual current monitoring takes place via an internal measuring current transformer. When the current respectively the residual current exceeds the set response value, the alarm LED lights and the associated alarm relay switches when the set response delay has elapsed.

The alarm messages are stored. The fault memory can be reset by pressing the reset button. The device function can be tested using the test button.

The currently measured value in per cent related to the set response value is indicated on the LED bar graph indicator.




Wiring diagram- system connection, external connections

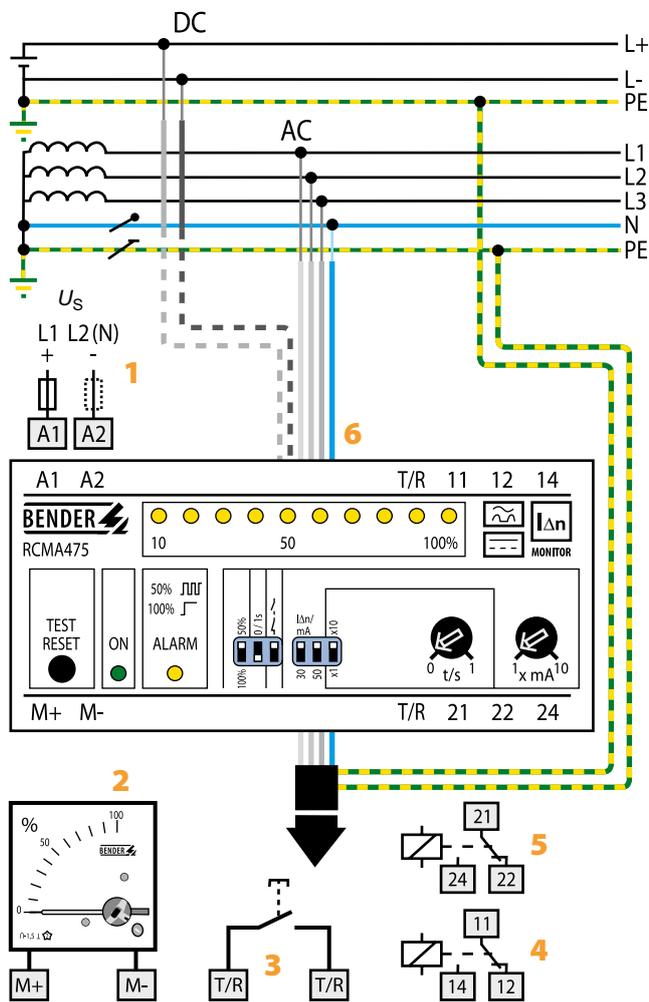

- 1 - Supply voltage U_s , see ordering information (6 A fuse recommended)
- 2 - External measuring instrument
- 3 - External test and reset button "T/R"
- 4 - Alarm relay (Alarm): switches when the fault current exceeds the response value of $I_{\Delta n1}$.
- 5 - Alarm relay (prewarning): switches when the fault current exceeds 50 % or 100 % of $I_{\Delta n1}$.
- 6 - Internal measuring current transformer

Do not route the PE conductor through the measuring current transformer!

Wiring diagram - front plate

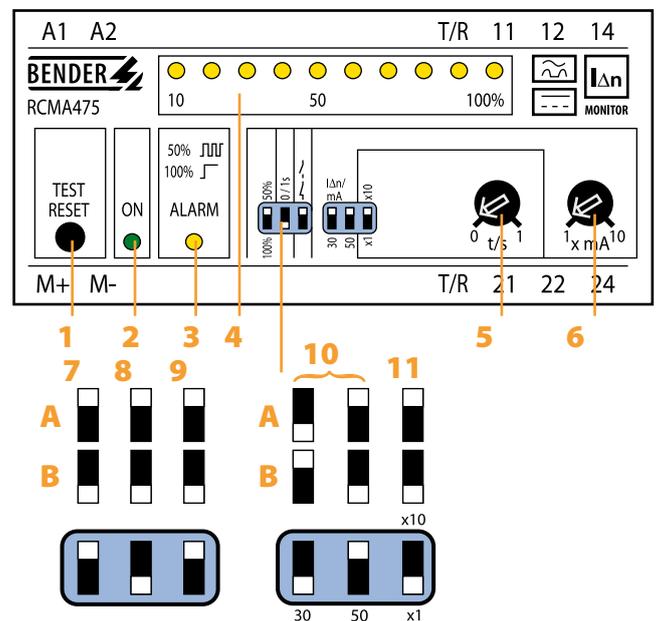

- 1 - Combined test/reset button "TEST/RESET"; short-time pressing ($< 1\text{ s}$) = RESET, long-time pressing ($> 2\text{ s}$) = TEST.
- 2 - Power On LED "ON": lights when the device is in operation and flashes when the measuring range is exceeded.
- 3 - Alarm LED "ALARM": lights when the fault current exceeds the set response value and flashes when 50 % of the set response value are reached.
- 4 - LED bar graph indicator, shows the measuring value in percent related to the preset response value.
- 5 - Potentiometer for setting the response delay (0...1 s).
- 6 - Potentiometer for setting the response value ($\times 1 \dots 10\text{ mA}$).

Setting of the DIP switches (white = switch position)

- 7 - Contact 21-22-24 (prewarning)
 - A - at 50 % of $I_{\Delta n1}$
 - B - at 100 % of $I_{\Delta n1}$
- 8 - Response delay prewarning
 - A - Delay 1 s
 - B - Delay 0 s
- 9 - Alarm relay
 - A - N/O operation
 - B - N/C operation
- 10 - Response range
 - A - 30 mA
 - B - 50 mA

$\} \times 1 \dots 10$
- 11 - Response delay
 - A - Setting value t/s $\times 10$
 - B - Setting value t/s $\times 1$

Technical data

Insulation coordination acc. to IEC 60664-1

Rated insulation voltage	AC 250 V
Rated impulse withstand voltage/pollution degree	4 kV/3

Voltage ranges

Supply voltage U_S	see ordering information
Operating range of U_S	0.85...1.1 x U_S
Frequency range of U_S	DC/50...60 Hz
Eigenverbrauch	≤ 3.5 VA

Measuring circuit/response values

Internal measuring current transformer	∅ 18 mm
Operating characteristics acc. to IEC/TR 60755	Type B
Rated residual operating current $I_{\Delta n2}$ (prewarning)	50%/100% of $I_{\Delta n1}$
Response delay t_V	0/1 s
Rated residual operating current $I_{\Delta n1}$ (alarm)	30...500 mA
Response delay t_V , adjustable	0...10 s
Rated frequency	0...700 Hz
Relative uncertainty of the response value	0...25%
Hysteresis	approx. 25% of the response value
Response time t_{an} at $I_{\Delta n1} = 1 \times I_{\Delta n1/2}$ ($t_V = 0$ s)	≤ 70 ms
Response time t_{an} at $I_{\Delta n1} = 5 \times I_{\Delta n1/2}$ ($t_V = 0$ s)	≤ 40 ms

Displays

LED bar graph indicator	0...100%
LEDs	Power On, prewarning, alarm

Inputs/outputs

Test and reset button	internal/external
Cable length for external test and reset button	≤ 10 m
Current source for external measuring instrument 0...100%	DC 0...400 μ A
Load	≤ 12.5 k Ω

Switching elements

Number of switching elements	2 x 1 changeover contact
Operating principle, adjustable	N/C operation/N/O operation
Electrical endurance, number of cycles	12000
Rated contact voltage	AC/DC 150 V
Making capacity	AC/DC 5 A
Breaking capacity	2 A, AC 230 V, cos phi = 0.4 0.2 A, DC 220 V, L/R = 0.04 s
Fault memory	ON

Environment/EMC

EMC immunity	EN 61543
EMC immunity	EN 61000-6-4
Shock resistance IEC 60068-2-27 (during operation)	15 g/11 ms
Bumping IEC 60068-2-29 (during transport)	40 g/6 ms
Vibration resistance IEC 60068-2-6 (during operation)	1 g/10...150 Hz
Vibration resistance IEC 60068-2-6 (during transport)	2 g/10...150 Hz
Ambient temperature (during operation)	-25...+70 °C
Ambient temperature (for storage)	-40...+75 °C
Climatic class acc. to DIN IEC 60721-3-3	3K5

Connection

Connection type	modular terminals
Connection properties	
rigid/flexible	0.2...4/0.2...2.5 mm ²
flexible with ferrules without/with plastic collar	0.25...2.5 mm ²
Conductor sizes (AWG)	24...12

Other

Operating mode	continuous operation
Mounting	any position
Degree of protection, internal components (IEC 60529)	IP30
Degree of protection, terminals (IEC 60529)	IP30
Type of enclosure	X475
Enclosure material	polycarbonate
Screw mounting	2 x M4
DIN rail mounting acc. to	IEC 60715
Installation into standard distribution panels acc. to	DIN 43871
Flammability class	UL94V-0
Product standards	IEC 62020, DIN EN 62020 (VDE 0663)
Operating manual	TBP404001
Weight	≤ 350 g

Ordering information

Response range $I_{\Delta n}$	Rated frequency	Time delay	Measuring current transformer internal diameter	Displays	Fault memory behaviour	Supply voltage U_S		Type	Art. No.
						AC	DC		
30...500 mA	0...700 Hz	0...10 s	∅ 18 mm	internal/external	■	230 V	–	RCMA475LY	B 9404 2002 ³⁾
						90...132 V ¹⁾	–	RCMA475LY-13	B 9404 2004 ³⁾
						–	9,6...84 V ¹⁾	RCMA475LY-21	B 9404 2014 ²⁾
						–	77...286 V ¹⁾	RCMA475LY-23	B 9404 2015 ²⁾

Other supply voltages on request

¹⁾ Absolute values of the operating range, ²⁾ For industrial application only, ³⁾ For industrial and household applications

Suitable system components


External measuring instrument				Measuring converter			
Displays	Size (mm)	Type	Art. No.	Input	Output	Type	Art. No.
0...100%	96 x 96	9604-4241	B 986 807	0...400 μ A	0...10 V / 0/4...20 mA	RK170	B 9804 1500

Conditions of operation according to IEC 62020, IEC/TR 60755 amendment 2, Type B

Current type	Graphic representation	Operating current
Alternating currents (50 Hz)		$0.5 \dots 1 \times I_{\Delta n}$
Pulsating direct currents (positive and negative half waves) half-wave current		$0.5 \dots 1.4 \times I_{\Delta n}$
Phase-controlled half-wave currents current delay angle $90^\circ \text{ el} / 135^\circ \text{ el}$		$0.5 \dots 1.4 \times I_{\Delta n}$
Half-wave current superimposed by a smooth direct current of 6 mA		$0.5 \dots 1.4 \times I_{\Delta n}$
Smooth direct current		$0.5 \dots 2 \times I_{\Delta n}$

Dimension diagram

Dimensions in mm

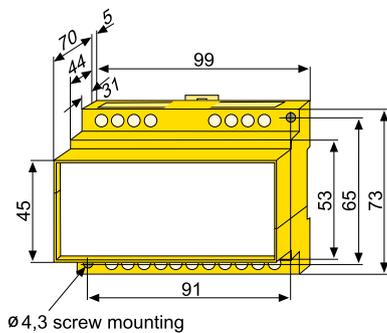



Bender GmbH & Co. KG

P.O. Box 1161 • 35301 Gruenberg • Germany
Londorfer Strasse 65 • 35305 Gruenberg • Germany
Tel.: +49 6401 807-0 • Fax: +49 6401 807-259
E-Mail: info@bender.de • www.bender.de



BENDER Group