

ISOMETER® iso415R-1

Insulation monitoring device
for unearthed 3(N)AC, AC and DC systems (IT systems)



Image similar

ISOMETER® iso415R-1

Insulation monitoring device
for unearthed 3(N)AC, AC and DC systems (IT systems)



Device features

- Monitoring of the insulation resistance for unearthed 3(N)AC, AC and DC systems with galvanically connected rectifiers
- Automatic adaptation to the system leakage capacitance up to 25 μF
- Response time $\leq 10 \text{ s}$ at $C_g = 1 \text{ } \mu\text{F}$ and $R_f = R_{an} / 2$
- Automatic and manual device self test with connection monitoring
- Two separately adjustable response value ranges (5...1000 $\text{k}\Omega$)¹
- Alarm output via LEDs (AL1, AL2) and alarm relay
- Selectable n/c or n/o relay operation¹
- Selectable start-up delay, response delay and delay on release¹
- Fault memory activatable¹
- RS-485 interface with Modbus RTU protocol
- NFC interface

¹ via Bender Connect app or Modbus RTU

Intended use

The iso415R-1 is used in unearthed systems to monitor the insulation fault R_f and to locate the R_f fault (positive or negative conductor) in DC systems. In addition to the limit value comparison, functions for connection monitoring, detection internal faults and the exceeding of the maximum permissible leakage capacitance C_g are available.

The DC components existing in AC/DC systems can have an influence on the response behaviour if an insulation fault occurs downstream of rectifiers with an electrolytic capacitor.

The separate supply voltage of the iso415R-1 also enables monitoring of a de-energised system.

Any other use than that described in this manual is regarded as improper.

Do not make any unauthorised changes to the device. Only use spare parts and optional accessories sold or recommended by the manufacturer.

Intended use also includes

- the observation of all information in the operating manual and
- compliance with test intervals.


To comply with the applicable standards, the device must be configured for the local system and operating conditions. Observe the operating limits specified in the technical data.

Functions



The iso415R-1 is an insulation monitoring device in accordance with IEC 61557-8 for IT systems.

The measured value R_f as well as all messages and alarms are displayed via LEDs and can be read out via the Modbus RTU and NFC interfaces. Furthermore, the messages and alarms are also output via the relay **K1**, depending on the message assignments that can be set via the interfaces.

Wiring diagram

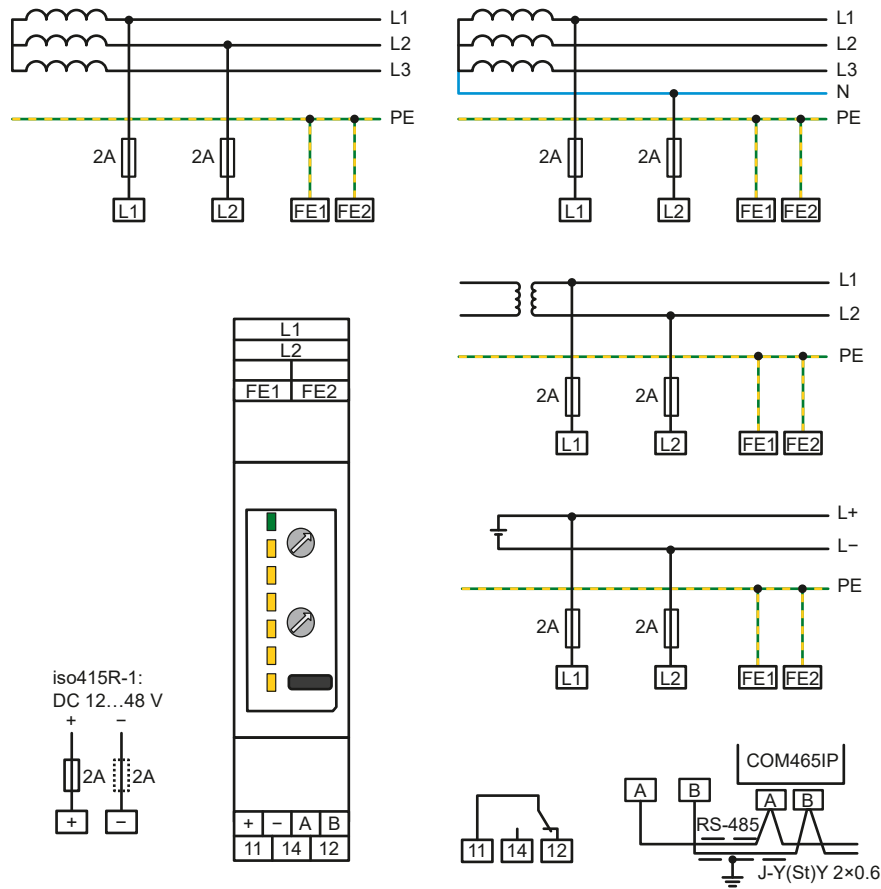

Connections overview

| | | Terminal | Connection |
|--------|---|------------|--------------------------------|
| top |  iso415R-1 top | FE1, FE2 | Functional Earth |
| | | L1, L2 | Monitored system |
| | | • | Not in use |
| bottom |  iso415R-1 bottom | A, B | RS-485 interface |
| | | +, - | Supply voltage DC 12...48 V |
| | | 11, 14, 12 | Relay |

Technical data

iso415R-1: Insulation coordination acc. to IEC 61010-1 and IEC 61010-2-30

Definitions

| | |
|-------------------------|------------|
| Measuring circuit (IC1) | L1/+, L2/– |
| Supply circuit (IC2) | +, – |
| Output circuit (IC3) | 11, 14, 12 |
| Control circuit (IC4) | FE1, FE2 |
| Control circuit (IC5) | A, B |
| Pollution degree | 2 |

Definition of circuits according to IEC 61010-1, section 6.7.1.5

| | |
|---|-----------------------------------|
| IC1 | Measuring circuit, CAT III, 600 V |
| IC2 | 60 V |
| (Secondary circuit, derived from primary circuit < AC 300 V, OVC II) ¹ | |
| IC3 | Mains circuit, OVC III, 300 V |
| IC4 / IC5 | ≤30 V, not dangerously active |

Protective separation (reinforced insulation) between the circuits

| | |
|----------------------|----------------------|
| IC1 / (IC2-IC5) | protective impedance |
| IC3 / (IC2, IC4-IC5) | |

Voltage tests (routine test) according to IEC 61010-1

| | |
|----------------------------|-----------|
| IC1 / IC4 | AC 510 V |
| IC3 / (IC1, IC2, IC4, IC5) | AC 2.2 kV |
| IC2 / (IC1, IC4, IC5) | AC 350 V |
| IC4 / IC5 | AC 200 V |

¹ Operation with SELV or PELV also possible

Supply voltage

iso415R-1: (+/–)

| | |
|-------------------------|--------------|
| Supply voltage U_s | DC 12...48 V |
| Tolerance of U_s | –20...+25 % |
| Power consumption | ≤ 1.1 W |
| Inrush current (< 5 ms) | < 10 A |

Monitored IT system

iso415R-1

| | |
|------------------------------|--------------------------|
| Nominal system voltage U_n | 3(N)AC, AC, DC 0...400 V |
| Tolerance of U_n | +15 % |
| Frequency range of U_n | 42...460 Hz |

Measuring circuit

| | |
|--|------------------|
| Measuring voltage U_m | ±16 V |
| Measuring current I_m at $R_F, Z_F = 0 \Omega$ | ≤ 90 μ A |
| Internal resistance R_i, Z_i | |
| iso415R-1 | ≥ 178 k Ω |
| Permissible system leakage capacitance C_e | ≤ 25 μ F |
| Permissible extraneous DC voltage U_{ig} | |
| iso415R-1 | ≤ 650 V |

Response values

| | |
|-------------------------------|--|
| Response value R_{an1} | 10...1000 k Ω (40 k Ω)* |
| Response value R_{an2} | 5...700 k Ω (10 k Ω)* |
| Relative uncertainty R_{an} | ±15 %, ±3 k Ω |
| Hysteresis R_{an} | 25 %, minimum 1 k Ω |

Time response

Relative uncertainty t_{an} at $R_F = 0.5 \times R_{an}$ and $C_e = 1 \mu$ F acc. to IEC 61557-8 ≤ 10 s

| | |
|------------------------------|-------------------|
| Start-up delay t^1 | 0...1800 s (0 s)* |
| Response delay t_{on}^1 | 0...1800 s (0 s)* |
| Delay on release t_{off}^1 | 0...1800 s (0 s)* |
| Recovery time | < 5 s |

¹ Can be parameterised via Bender Connect app and Modbus

Displays, memory

| | |
|--|--|
| Display | Status LED incl. LED bargraph (7 LEDs) |
| Display range insulation resistance (R_F) | 1...1000 k Ω |
| Measuring range insulation resistance (R_F) ¹ | 1...10000 k Ω |
| Operating uncertainty | ± 15 % ± 3 k Ω |
| Fault memory alarm messages ² | on/off (off)* |

¹ Step size: 1 k Ω

² Can be parameterised via Bender Connect app and Modbus

RS-485 interface

| | |
|---|---|
| Protocol | Modbus RTU |
| Baud rate ¹ | max. 115.2 kbit/s (19.2 kbit/s)* |
| | max. 9.6 kbit/s for 1200 m cable length |
| Parity ¹ | even, no, odd (even)* |
| Stop bits ¹ | 1 / 2 / auto (auto)* |
| Device address, Modbus RTU ² | 1...247 (100 + SN)* |
| Cable length | ≤ 1200 m |
| Cable type | min. J-Y(St)Y 2 × 0.6 |
| Termination resistor (external) | 120 Ω (0.25 W) |

¹ Can be parameterised via Bender Connect app and Modbus

² Factory setting: 100 + last two digits of serial number

Switching elements

| | |
|----------------------------------|----------------------|
| Switching elements | 1 changeover contact |
| Operating principle ¹ | n/c / n/o (n/c)* |
| Electrical endurance | 10,000 cycles |

¹ Can be parameterised via Bender Connect app and Modbus

Contact data acc. to IEC 60947-5-1

| | |
|-------------------------------------|---------------------------------------|
| Utilisation category | AC-12 / AC-14 / DC-12 / DC-12 / DC-12 |
| Rated op. voltage | 250 V / 250 V / 24 V / 110 V / 220 V |
| Rated op. current | 5 A / 2 A / 1 A / 0.2 A / 0.1 A |
| Minimum contact rating ¹ | 10 mA at AC/DC ≥ 10 V |

¹ refers to relays that have not been operated with high contact currents

Connection

iso415R-1

| | |
|-----------------|------------------------|
| Connection type | Push-in plug connector |
| Nominal current | ≤ 5 A |

Connection properties for grid dimension 3.5 mm

| | |
|-------------------------------------|---|
| rigid | 0.2...1.5 mm ² (AWG 24...16) |
| flexible | 0.2...1.5 mm ² (AWG 24...16) |
| with ferrule with plastic sleeve | 0.25...0.5 mm ² |
| with ferrule without plastic sleeve | 0.25...1.5 mm ² |

Connection properties for grid dimension 5.08 mm (relay switching contacts)

| | |
|-------------------------------------|---|
| rigid | 0.2...1.5 mm ² (AWG 24...16) |
| flexible | 0.2...1.5 mm ² (AWG 24...16) |
| with ferrule with plastic sleeve | 0.25...1.5 mm ² |
| with ferrule without plastic sleeve | 0.25...1.5 mm ² |

Environment/EMC

| | |
|--------------------|---------------|
| EMC | IEC 61326-2-4 |
| Operating altitude | ≤ 2000 AMSL |

Ambient temperatures

| | |
|-----------|--------------|
| Operation | −25...+55 °C |
| Transport | −40...+85 °C |
| Storage | −40...+70 °C |

Climatic conditions acc. to IEC 60721 (related to temperature and relative humidity)

| | |
|-----------------------------------|------|
| Stationary use (IEC 60721-3-3) | 3K22 |
| Transport (IEC 60721-3-2) | 2K11 |
| Long-term storage (IEC 60721-3-1) | 1K22 |

Mechanical conditions acc. to IEC 60721

| | |
|-----------------------------------|------|
| Stationary use (IEC 60721-3-3) | 3M11 |
| Transport (IEC 60721-3-2) | 2M4 |
| Long-term storage (IEC 60721-3-1) | 1M12 |

Other

| | |
|----------------|---|
| Operating mode | continuous operation |
| Mounting | cooling slots must be ventilated vertically |

| | |
|--|---------------|
| Degree of protection, internal components (DIN EN 60529) | IP30 |
| Degree of protection, terminals (DIN EN 60529) | IP20 |
| Enclosure material | polycarbonate |
| DIN rail mounting acc. to | IEC 60715 |
| Flammability class | UL 94 V-0 |
| Weight | ≤ 100 g |

(*) Factory setting

Standards and certificates

Marks



Standards

Devices in the iso415R-1 series have been developed in accordance with the following standards.

- IEC 61557-8

Licences

For a list of the open-source software used see our [Website](#).

Declarations of conformity


Bender GmbH & Co. KG hereby declares that the device covered by the Radio Equipment Directive complies with Directive 2014/53/EU.

The complete EU and UK declarations of conformity are available in the download area:

<https://www.bender.de/en/service-support/download-area/>

Dimension Diagram

Pluggable push-in terminals

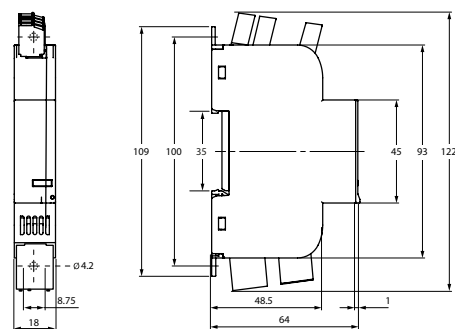

Maße in mm

Ordering information

| Type | Supply voltage U_s | Nominal system voltage U_n | Art. No. |
|-----------|----------------------|------------------------------|-----------|
| iso415R-1 | DC 12...48 V | 3(N)AC, AC, DC 0...400 V | B81604000 |

Accessories

| Description | Art. No. |
|---|-----------|
| SMARTDETECT ISO41xR connector kit for push-in terminals | B80609102 |
| SMARTDETECT 41x sealable cover | B80609199 |



Bender GmbH & Co. KG

Londorfer Straße 65
35305 Grünberg
Germany

Tel.: +49 6401 807-0
info@bender.de
www.bender.de



© Bender GmbH & Co. KG, Germany
Subject to change!
The specified standards take into account the
edition valid until 12.2025 unless otherwise
indicated.